


11.99.5449



VALUE DVI-VGA Kabel, DVI (12+5) ST - VGA ST, 5,0m

VALUE Câble DVI, DVI (12+5) M-VGA M, 5,0m

VALUE DVI Cable, DVI (18+5) - HD15, M/M, 5 m

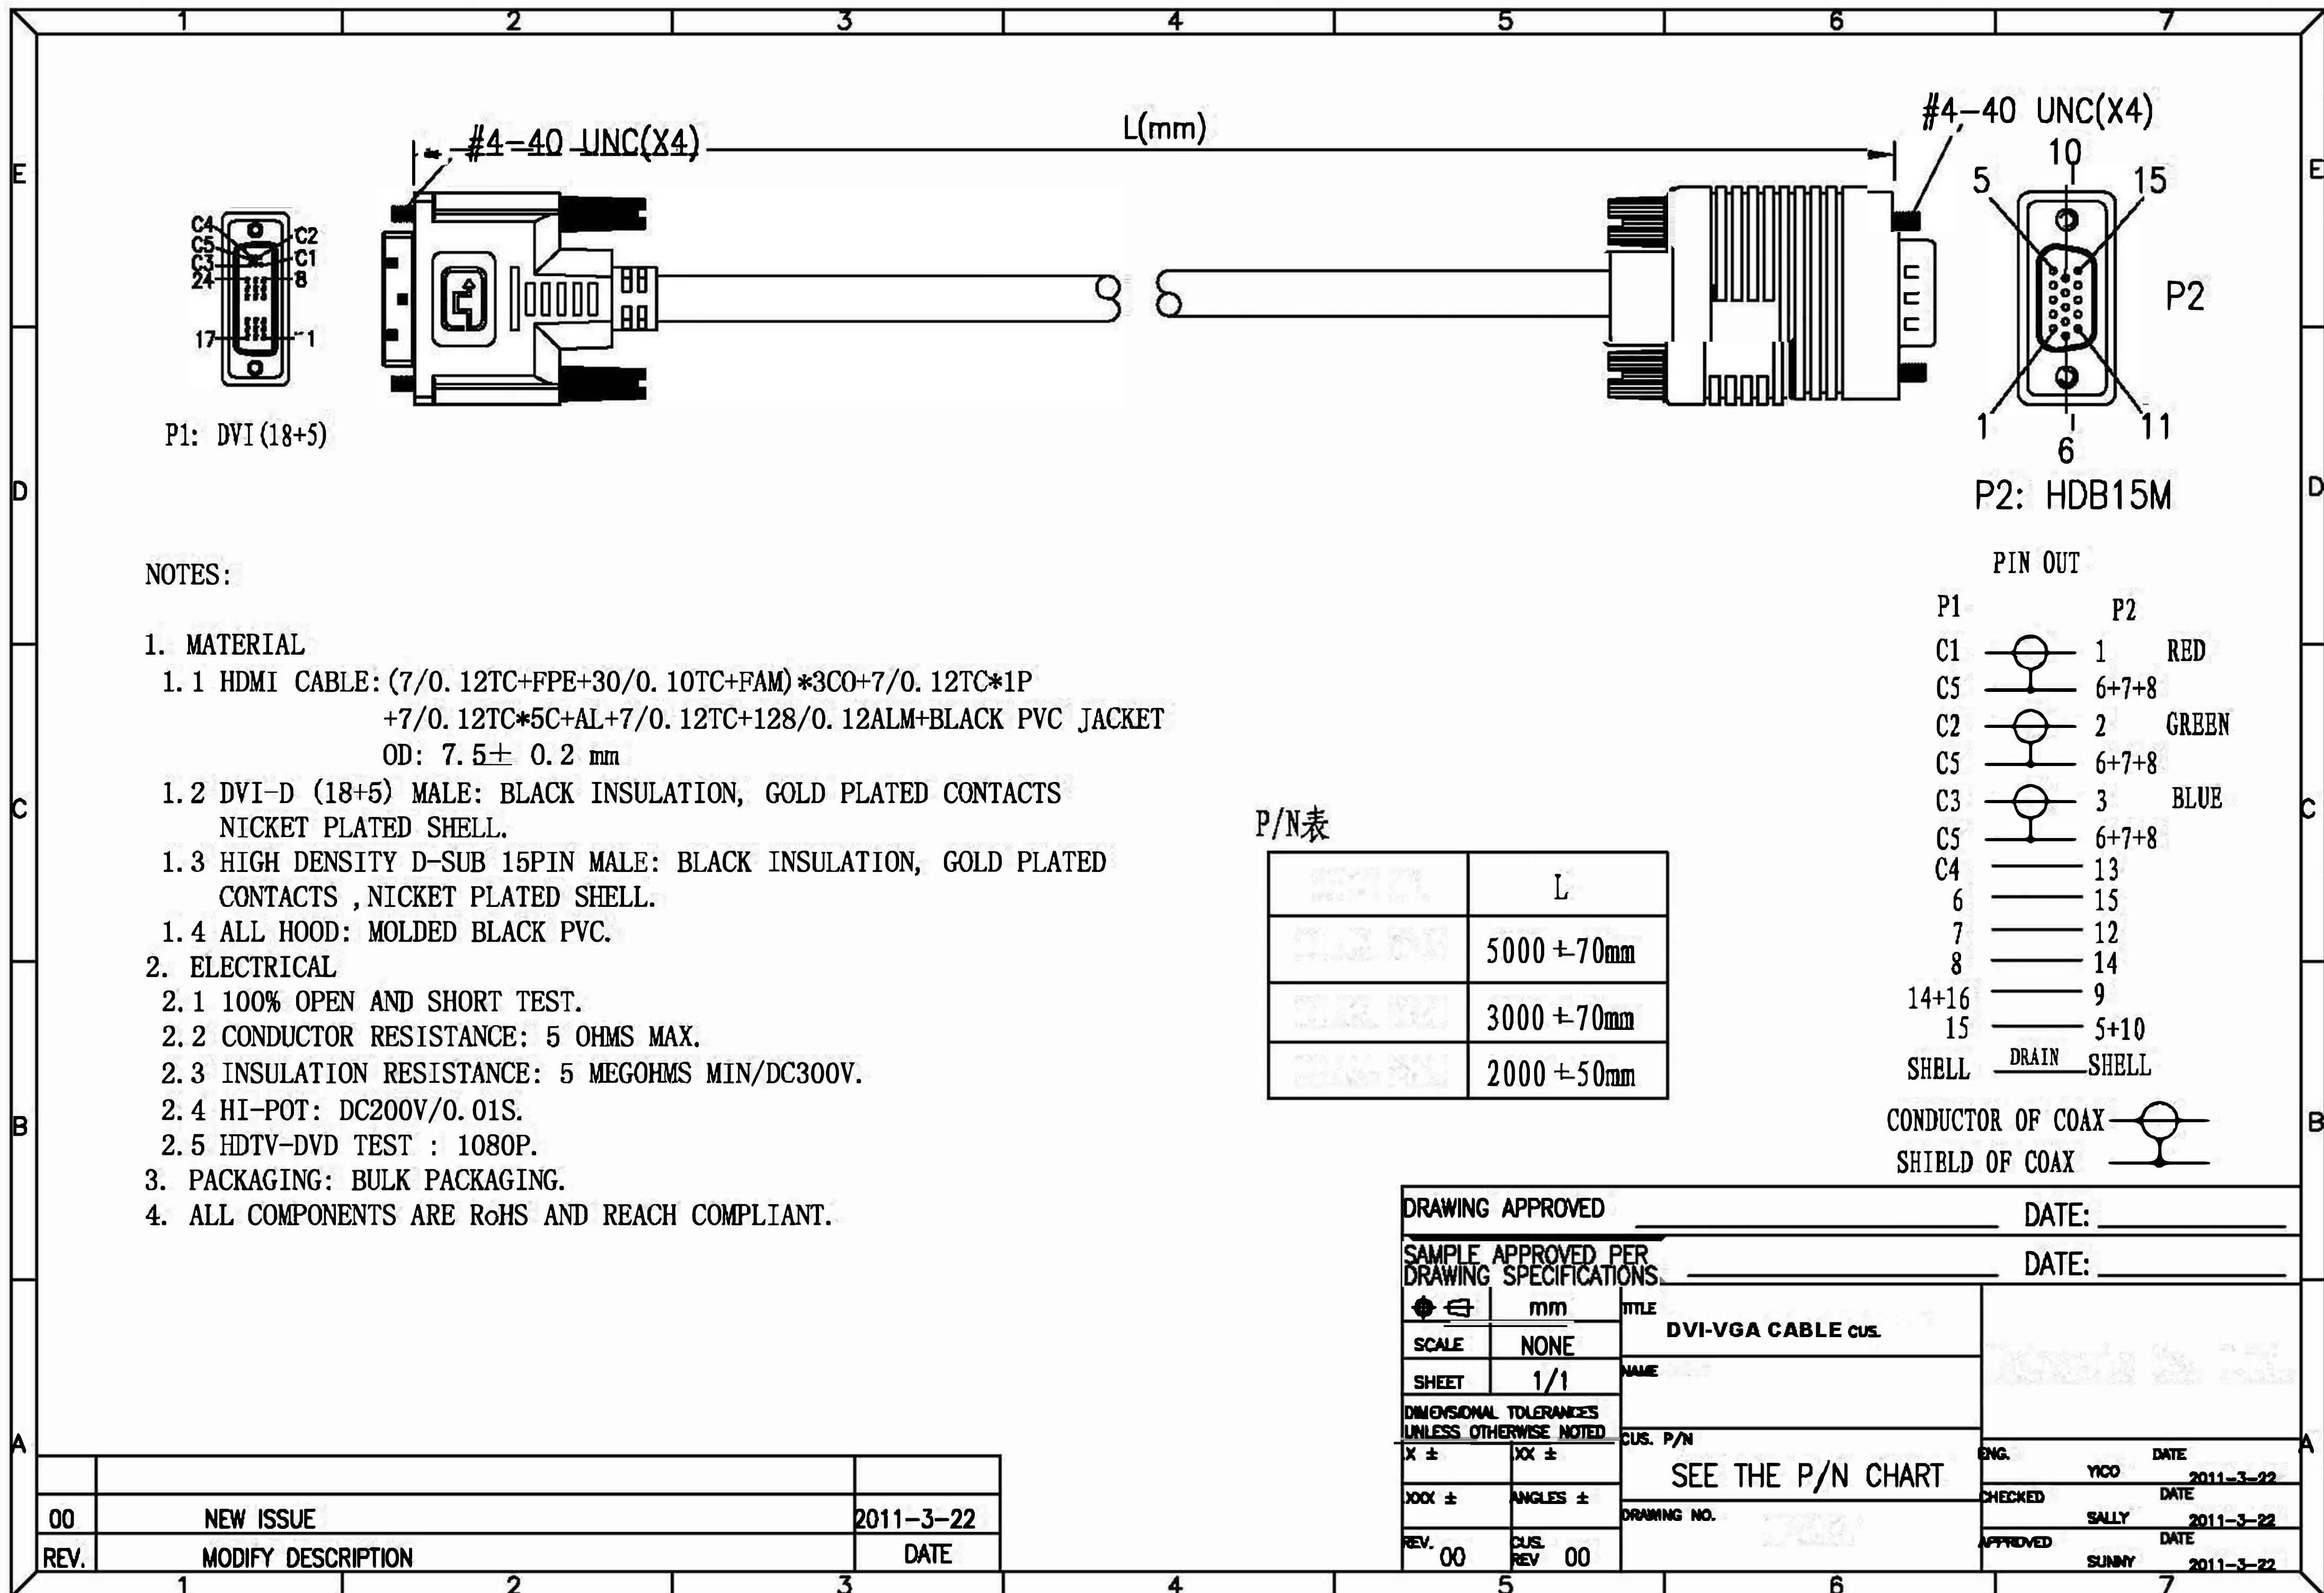

P1: DVI (18+5)

P2: HDB15M

NOTES:

1. MATERIAL

1.1 HDMI CABLE: (7/0.12TC+FPE+30/0.10TC+FAM)*3CO+7/0.12TC*1P
+7/0.12TC*5C+AL+7/0.12TC+128/0.12ALM+BLACK PVC JACKET
OD: 7.5± 0.2 mm

1.2 DVI-D (18+5) MALE: BLACK INSULATION, GOLD PLATED CONTACTS
NICKET PLATED SHELL.

1.3 HIGH DENSITY D-SUB 15PIN MALE: BLACK INSULATION, GOLD PLATED
CONTACTS ,NICKET PLATED SHELL.

1.4 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

2.1 100% OPEN AND SHORT TEST.

2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.

2.3 INSULATION RESISTANCE: 5 MEGOHMS MIN/DC300V.

2.4 HI-POT: DC200V/0.01S.

2.5 HDTV-DVD TEST : 1080P.

3. PACKAGING: BULK PACKAGING.

4. ALL COMPONENTS ARE RoHS AND REACH COMPLIANT.

P/N表

	L
	5000 ±70mm
	3000 ±70mm
	2000 ±50mm

PIN OUT

P1	P2
C1	1 RED
C5	6+7+8
C2	2 GREEN
C5	6+7+8
C3	3 BLUE
C5	6+7+8
C4	13
6	15
7	12
8	14
14+16	9
15	5+10
SHELL	DRAIN SHELL
CONDUCTOR OF COAX	
SHIELD OF COAX	

DRAWING APPROVED _____		DATE: _____	
SAMPLE APPROVED PER _____		DATE: _____	
DRAWING SPECIFICATIONS			
mm	TITLE		
SCALE	NONE	DVI-VGA CABLE CUS.	
SHEET	1/1	NAME	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED		CUS. P/N	
X ±	XX ±	SEE THE P/N CHART	
XXX ±	ANGLES ±	DRAWING NO.	
REV. 00	CUS. REV 00		
		ENG.	DATE
		YCO	2011-3-22
		CHECKED	DATE
		SALLY	2011-3-22
		APPROVED	DATE
		SUNNY	2011-3-22

00	NEW ISSUE	2011-3-22
REV.	MODIFY DESCRIPTION	DATE