

DATASHEET

USB3.0 Connection Cable A-A, M-M, 1.0m, black, Premium



General data

For data transmission rates up to 5 Gbit/s. Wire construction: AWG30 / AWG20. Shielding: Foil + 80% braiding. Plug moulded.

Allgemeine Daten

Number of poles connection 2	9
Number of poles connection 1	9

Kabelaufbau

Connection type connection 2	plug
Connection type connection 1	plug
Type of connector connection 2	USB-A
Type of connector connection 1	USB-A

Available variants

ArtNr.	Bezeichnung	Colour	Length
K5210SW.1	USB3.0 Connection Cable A-A, M-M, 1.0m, black, Premium	black	1.0 m
K5210SW.1,8	USB3.0 Connection Cable A-A, M-M, 1.8m, black, Premium	black	1.8 m


Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

DATASHEET

USB3.0 Connection Cable A-A, M-M, 1.0m, black, Premium

K5210SW.3	USB3.0 Connection Cable A-A, M-M, 3.0m, black, Premium	black	3.0 m
K5210SW.5	USB3.0 Connection Cable A-A, M-M, 5.0m, black, Premium	black	5.0 m

Drawings

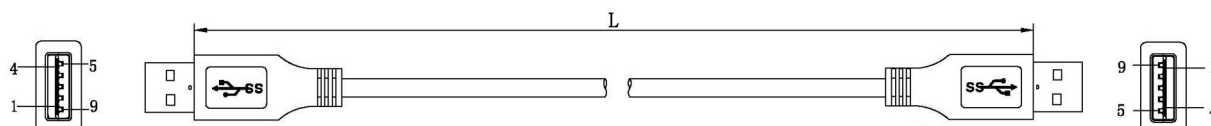

NOTES:

1. MATERIALS

- 1.1 CABLE: AWG30 PIMF * 2P (SS) + AWG30 * 1P (HS) + 2C AWG20 (POWER)
 DETAIL: (7/0.10BC*1P+7/0.10BC+FAM)*2PCS+7/0.32BC*2C+7/0.10BC*1P+
 AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET;
 OD: 5.5 ± 0.15MM

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE

- 1.2 USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION,
 GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

- 1.3 ALL HOOD: MOLDED BLACK PVC.

2. TESTING: 100% OPEN AND SHORT TEST.

3. PACKING: 1PC/PE BAG.

4. ALL MATERIAL BE RoHS COMPLIANT.

P/N

NUMBER	L
K5210SW.1	1000 ± 30MM
K5210SW.1,8	1800 ± 50MM
K5210SW.3	3000 ± 70MM
K5210SW.5	5000 ± 70MM

