


CABLE CAT. 7 SFTP LSZH FLEXIBLE 100M NEGRO

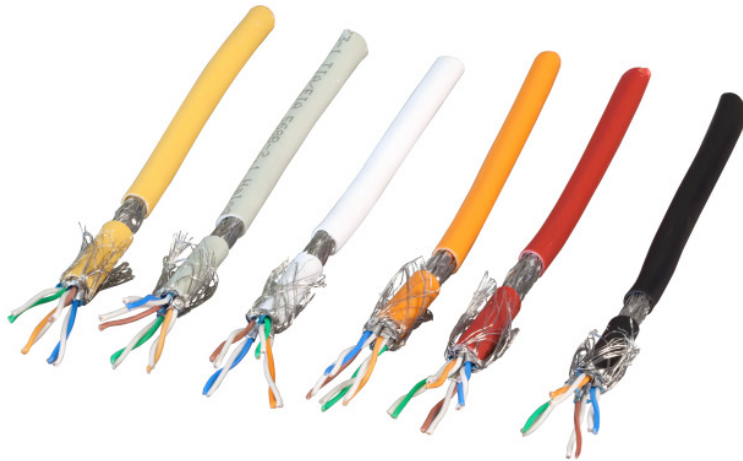

Cat.7

FRNC-B

Description

The patch cable MK7104 is constructed for transmissions up to 600 MHz and exceeds with the electrical transmission properties and requirements of the category 7. With this cable transmission rates up to 10 GBit according to IEEE 802.3 are possible.

Kabelaufbau

Category	7
Conductor category	Class 2 = stranded
Conductor material	CU, tinned
AWG-size/quantity of cores	26/7
Screen over stranding	braiding
Stranding element	pairs
Screen over stranding element	foil
Core insulation	foam-skin PE
Core identification	colour

Kabelmantel

Material outer sheath	FRNC-B
Flame retardant	nach EN 60332-1

Available variants

Article no.	Title	Length	Colour outer sheath	Number of cores	Type	Outer diameter approx.
MK7104100B	Raw cable Cat.7, S/FTP, LSZH, black, 100m ring	100.0 m	black	8	simplex	6.5
MK7104100BL	Raw cable Cat.7, S/FTP, LSZH, blue, 100m ring	100.0 m	blue	8	simplex	6.5

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

DATASHEET

Raw cable Cat.7, S/FTP, LSZH

Article no.

MK7104100

MK7104100BR	Raw cable Cat.7, S/FTP, LSZH, brown, 100m ring	100.0 m	brown	8	simplex	6.5
MK7104100G	Raw cable Cat.7, S/FTP, LSZH, grey, 100m ring	100.0 m	grey	8	simplex	6.5
MK7104100GR	Raw cable Cat.7, S/FTP, LSZH, green, 100m ring	100.0 m	green	8	simplex	6.5
MK7104100LR	Raw cable Cat.7, S/FTP, LSZH, light green, 100m ring	100.0 m	light green	8	simplex	6.5
MK7104100O	Raw cable Cat.7, S/FTP, LSZH, orange, 100m ring	100.0 m	orange	8	simplex	6.5
MK7104100P	Raw cable Cat.7, S/FTP, LSZH, pink, 100m ring	100.0 m	pink	8	simplex	6.5
MK7104100R	Raw cable Cat.7, S/FTP, LSZH, red, 100m ring	100.0 m	red	8	simplex	6.5
MK7104100V	Raw cable Cat.7, S/FTP, LSZH, violet, 100m ring	100.0 m	violet	8	simplex	6.5
MK7104100W	Raw cable Cat.7, S/FTP, LSZH, white, 100m ring	100.0 m	white	8	simplex	6.5
MK7104100Y	Raw cable Cat.7, S/FTP, LSZH, yellow, 100m ring	100.0 m	yellow	8	simplex	6.5

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Calle Electrónica, 24, 28923
Alcorcón, Madrid

info@sunprored.es
comercial@sunprored.es

Telf: 915 00 79 63