

Serie Conectores 1.6/5.6

75 ohmios 0-1 GHz


Los conectores 1.6 / 5.6 son adecuados para su uso en sistemas de comunicación de 75 ohmios.

Estos conectores se han convertido en el estándar reconocido en sistemas de telecomunicaciones en muchas partes del mundo.


Estos conectores cuentan con un acoplamiento roscado para garantizar la integridad del acoplamiento y un acoplamiento a presión para facilitar la conexión y desconexión.

Dimensiones de la interfaz:

Macho

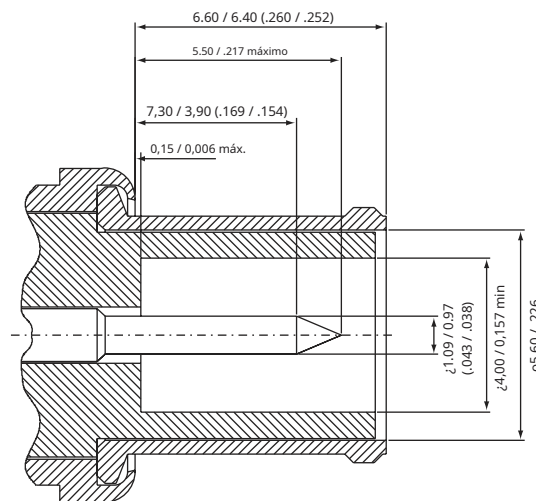

Hembra

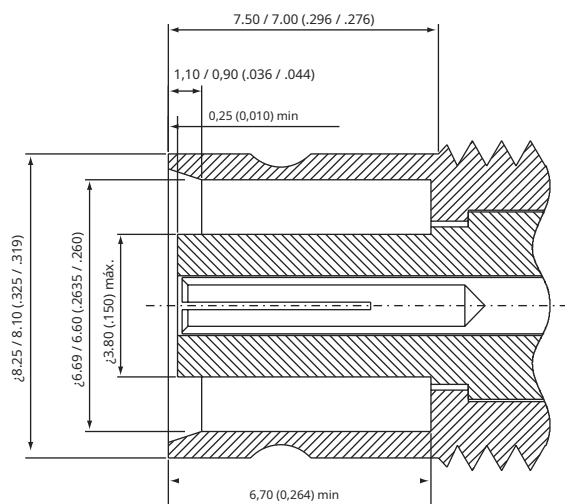


Eléctrico:

Rango de Impedancia	75 ohmios
Frecuencia	0 a 1 GHz

Ideal Technology tiene una política de mejora continua. Las especificaciones están sujetas a cambios sin previo aviso.

Product Specifications

Drawing Number	Part Number	Description
030325	AD39MMH	L9 Double Males To Female Y Link Adaptor 15mm Center Distance, Discoupled 0dB/5dB/10dB/20dB/25dB

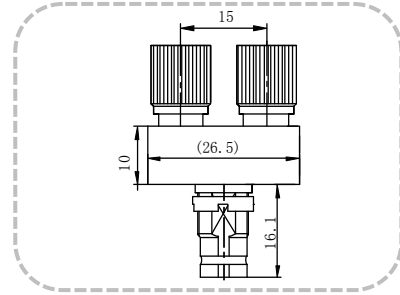

Electric Data		
Characteristic Impedance	75ohm	
Frequency Range	0-1GHz	
Working Voltage	330 VRMS(max at sea level)	
Dielectric Withstanding Voltage	1000 VRMS(min at sea level)	
Contact Resistance	Inner: 10 milliohms(max)	
	Outer: 5 milliohms(max)	
Insulation Resistance	10000 megohms(min)	
Mechanical Data		
Durability Mating	500 Cycles min.	
Material Data		
Connector Parts	Materials	Plating Finish
Body	Brass	Nickel or Gold
Male Pin	Brass	Gold
Female Pin	Beryllium Bronze/Phosphor Bronze	Gold
Insulators	PTFE	N/A
Environmental Data		
Temperature Range	-40~+85°C	

Note: We can provide other materials and plating specifications according to customers ' requirements