


C1150

BNC Plug Terminator

50Ω

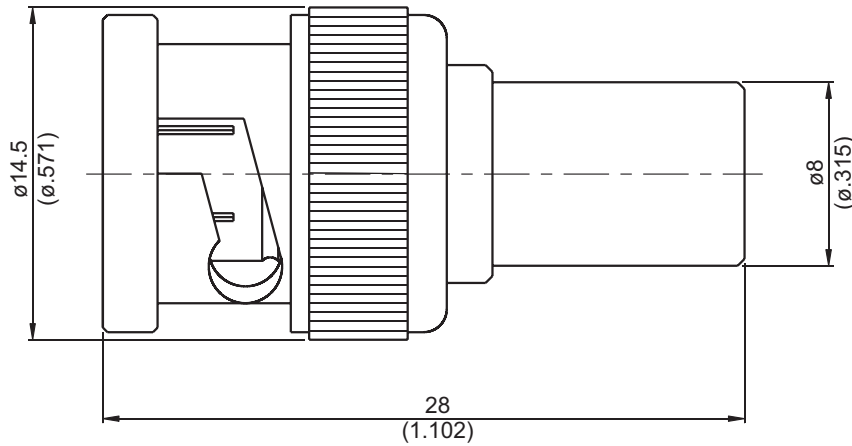

2W average power from -55°C to 70°C linearly derated to 1 Watt at 165°C
VSWR ≤ 1.2 UP TO 4 GHz

| Parts | Material | Plating (Micro-inch) |
|--------------|----------|---|
| Contact Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Contact Pin | Brass | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Gasket | Silicon | |
| Washer | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Spring | SK5 | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Insulator | Teflon | |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

Weight: 11.47 g