

Ref.: PA50C3




Datos técnicos

Material	Acero laminado 1,2 mm.
Anchura	19"
Altura	1U
Categoría	3
Nº de puertos	50
Tipo de conexión	LSA
Tipo de conector	Krone
Color	Negro RAL9005

Referencias

Referencia	Descripción
PA50C3	Panel ISDN Cat.3 50 puertos 19" 1U Krone LSA
PA25C3	Panel ISDN Cat.3 25 puertos 19" 1U Krone LSA

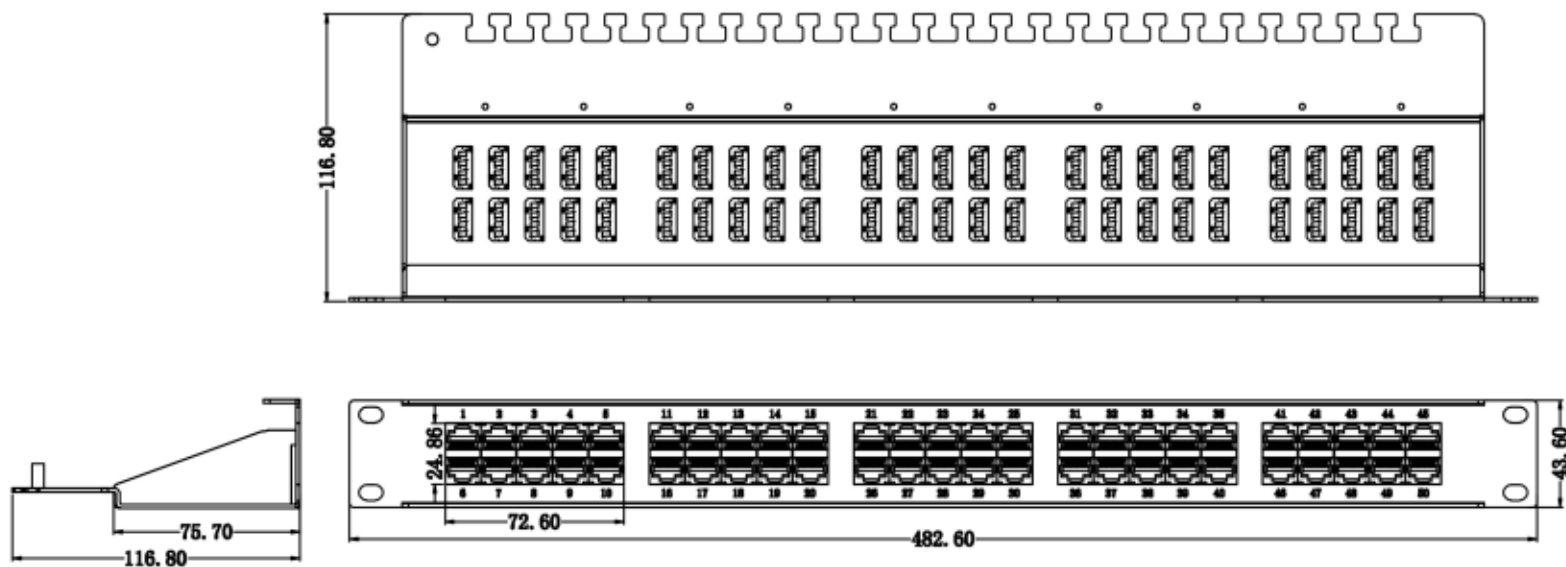

NOTES:

ELECTRICAL:

1. Contact Resistance : 200MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testing for Cat. 5E to ISO/IEC 11801 Ed. 2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568-C.2 (2009-08)
IEC 60603-7-51 Ed. 1 (12/2008)
5. Compliance with Class EA up to 500MHz to ISO/IEC 11801 ED. 2.2:2011-06
DIN EN 50173-1:2011-09

ENVIRONMENTAL:

1. Storage : -40° TO +70°
2. Operation : -10° TO +60°

MECHANICAL

1. SHIELD MATERIAL: ZINC ALLOY
2. IDC MATERIAL: PC UL94V0 TERMINAL: PHOSPHOR BRONZE, TIN PLATING
3. RJ45 Contact Life: 750 Times Min
4. Plug force: <30N
5. Solid cable: 1/22AWG (0.65MM) - 1/24AWG (0.45MM) ID: 0.8MM - 1.6MM
6. Stranded cable: 7/22AWG (0.76MM) - 7/26AWG (0.49MM) ID: 0.8MM - 1.6MM
7. Cable OD: 5.0mm - 8.5mm
8. PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
9. 360° Shield connection

Fluke Test: Permanent Link ISO 11801 (PL) Class E

RoHS 2.0 Compliant